






Bravo 900

Electrical submersible slurry pump

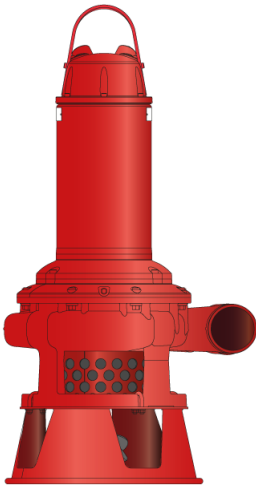

60 Hz	Bravo 900
Discharge connection F	6"
Rated power P_2 [kW/hp]	78 / 104,5
Max. power consumption P_1 [kW]	84
Shaft speed [rpm]	1775
Rated current at 460V	125 A
Rated current at 575V	101 A
Solids passage with agitator [mm/inch]	36 / 1 2/5
Height [mm/inch]	1779 / 70
Diameter [mm/inch]	875 / 34 1/2
Weight [kg/lbs]	845 / 1863
Other voltages on request	

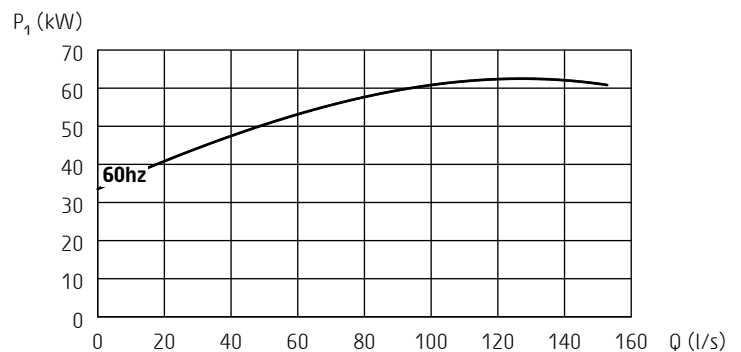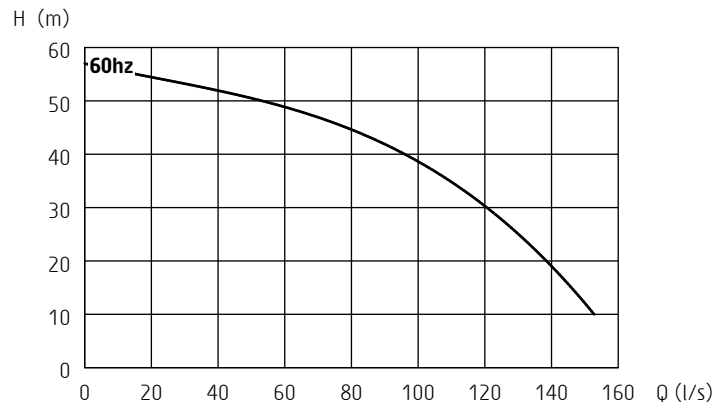

ISO 9906/A

General description

Pump with closed impeller and agitator for reliable pumping of highly abrasive slurry in high concentrations

Classification

Electrical submersible slurry pump

Protection class: IP 68

Electrical motor

Squirrel cage induction motor

Insulation class: H (IEC 85), DOL or star/delta

Motor protection

Thermoswitches in motor windings

This pump must be used with external motor protection in accordance with technical data

Cable - SubCab 20 m (66 ft)

400-500V DOL: 4x35mm² + 2x1.5mm²

400-500V Y/D: 2x4x16mm² + 2x1.5mm²

Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: tungsten carbide - tungsten carbide

Material upper seal: tungsten carbide - tungsten carbide

Materials

Drive unit: *Cast iron*

Pump housing: *Hard-Iron™*

Impeller: *Hard-Iron™*

Lifting handle: *Stainless steel*

Shaft: *Stainless steel*

Agitator: *Hard-Iron™*

Studs, screws and nuts: *Stainless steel*

O-rings: *Nitrile rubber*

Limitations

Max. submersion depth: 20 m (66 ft)

Max. liquid temperature: 40 °C (104 °F)

Allowed pH range: 5.5 - 14

Specifications can be changed without notice